



BRISA® | ORIGINAL & DISTRESSED



533-5747 White

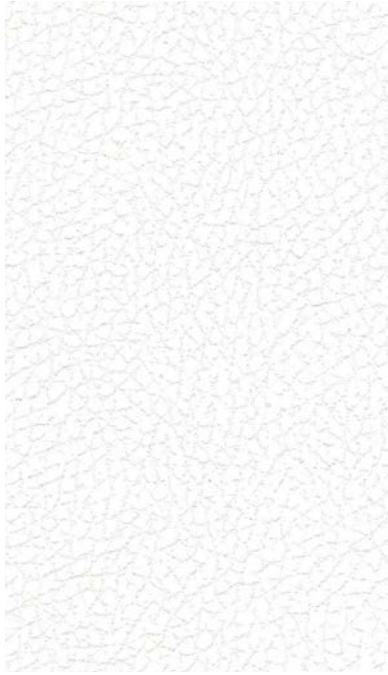

533-3019 Birch



533-3277 Moon



* 535-3480 Navajo Ivory




* 535-3274 Coyote




533-3914 Bark




533-5820 Quicksilver



* 535-3871 Moccasin



* 535-3271 Koala



533-3022 Shiitake



533-5749 Black Onyx



* 535-3201 Bison




* 535-7773 Stormy

* BRISA® | DISTRESSED

ULTRALEATHER® | ORIGINAL



291-0001 White



291-5668 Silver Pearl



291-5200 Citrus



291-4314 Herbal Mist



291-2552 Riviera



291-5666 Dove Grey



291-8233 Autumn Leaf



291-4351 Shetland



291-2508 Rain Dance



291-5763 Charcoal



291-1311 Brick



291-2509 Poseidon



291-2478 Diplomat Blue

COLLECTION	COMPOSITION	WEIGHT / THICKNESS	REPEAT	ABRASION
BRISA® ORIGINAL BRISA® DISTRESSED Breathable Technology Acoustical Properties	100% Polycarbonate Polyurethane Surface 65% Polyester, 35% Rayon Backing	8.9 oz. per sq. yard 300 grams per sq. metre / Approx. 0.95 mm	8"V x 10.5"H / 203mm V x 267mm H (Distressed)	ASTM D4157 / 300,000 DR** BS EN ISO 12947-2 / 160,000 R* **Wyzenbeek *Martindale
ULTRALEATHER® ORIGINAL	100% Polycarbonate Polyurethane Surface 100% Rayon Backing	9.7 oz. per sq. yard 330 grams per sq. metre / Approx. 0.95 mm	N/A	ASTM D4157 / 400,000 DR** BS EN ISO 12947-2 / 180,000 R* **Wyzenbeek *Martindale

WIDTH 54"

HYDROLYSIS 14+ Weeks
ASTM D3690 SECT. 6.11 (Hydrolytic Stability) / ISO 1419 Method C (Accelerated Ageing)

F/R RATING ASTM E84 (Adhered) - Class A
CA TB 117 - Pass
FMVSS 302 & 95/28 ANNEX IV - Pass
NFPA 260 - Class 1
UFAC - Class 1

Can be treated to meet FAR specifications. These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of ASTM E84 (Unadhered), BS 5852 Source 0, 1 & 5 (Cig, Match and Crib 5), BS 7175, BS 5867 Part 2 Type B, IMO FTPC Part 8 and NFPA 701.

ADHESION OF COATING ASTM D751

TEAR STRENGTH ASTM D2261

BREAKING STRENGTH ASTM D5034

TENSILE STRENGTH BS EN ISO 1421

CROCKING: AATCC 8, Grade 4-5 Wet & Dry

LIGHT FASTNESS: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

AIR PERMEABILITY / SOUND ABSORPTION Brisa® | Original and Brisa® | Distressed Only:
ASTM D737 / ASTM C423

CLEANING & CARE INSTRUCTIONS

- Wipe up spills as soon as they occur
- Clean with soap and water
- Sanitize using disinfectants such as (1:5) bleach/water solution
- Thoroughly rinse all solution residue with clean water
- Air dry

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit www.ultrafabricsinc.com.

To view more colors from these patterns or our entire fabric collection, visit allseating.com ☎ 1 800 563 3502 ✉ 1 800 272 9911

TORONTO
5800 Avebury Road, Unit 2
Mississauga, ON L5R 3M3

CHICAGO*
325 North Wells Street, Suite 210
Chicago, IL 60654

NEW YORK*
1140 Broadway, Suite 307
New York, NY 10001

SKU B10043 / MARCH 2021

*By appointment only