


**This disassembly instruction is applicable to Allora Side/4-Leg with Arm and Tablet Chair.**

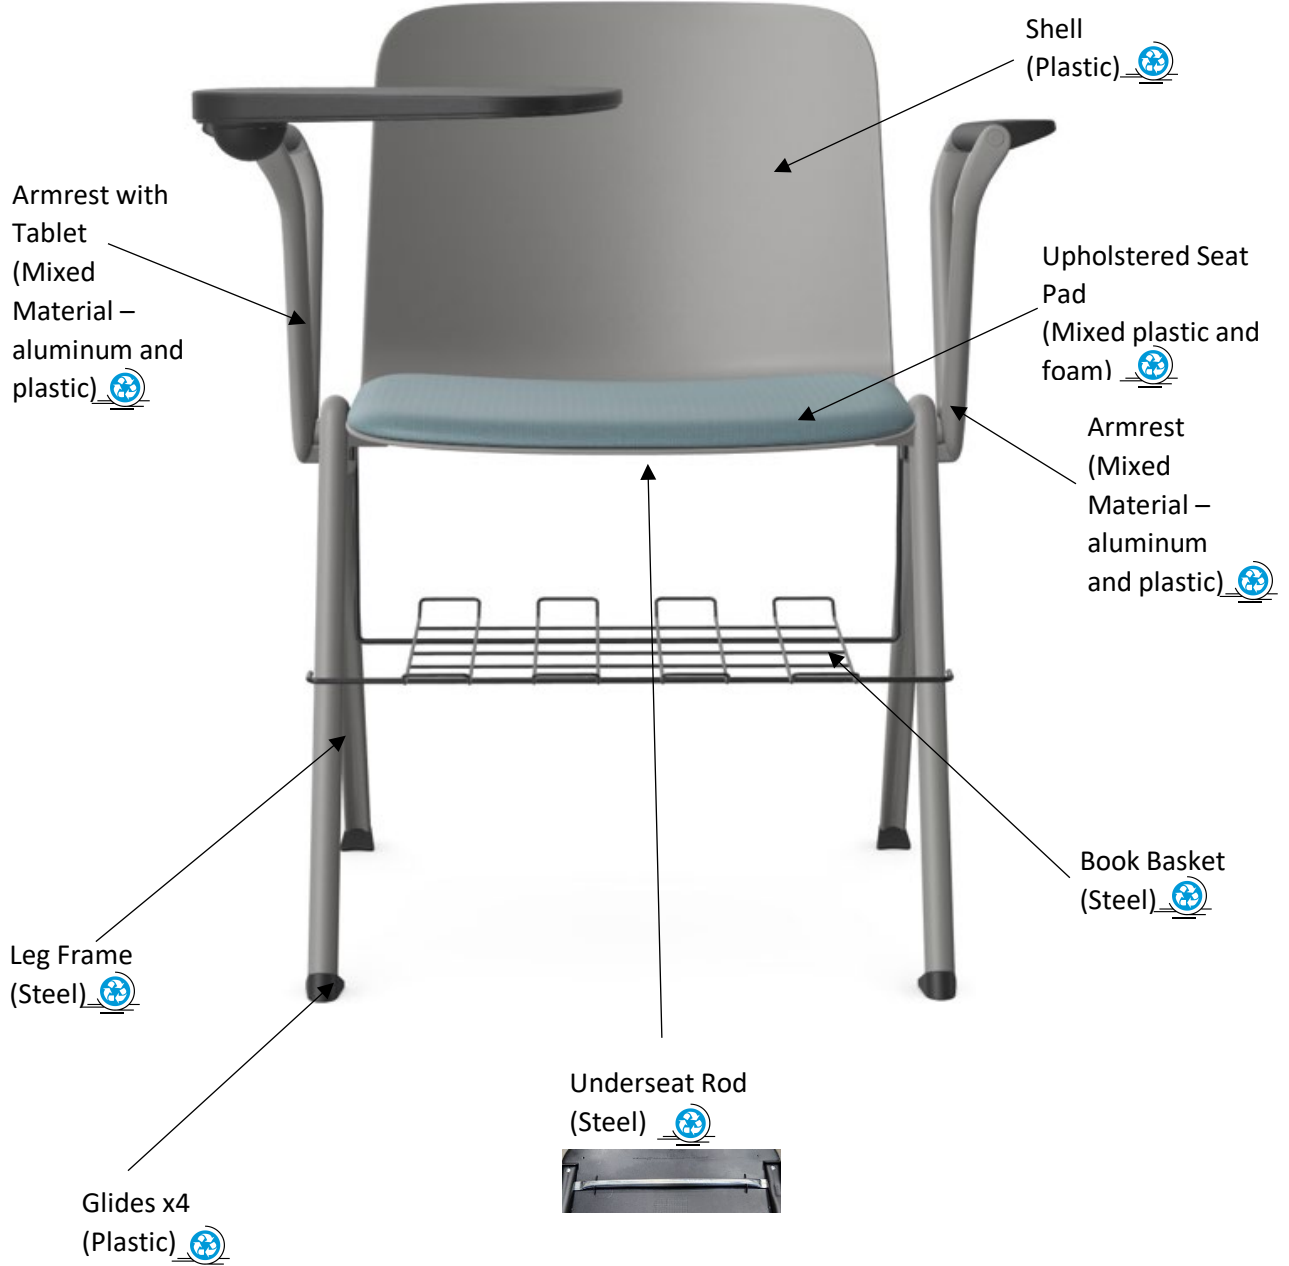

**For material recycling information please refer to the End of Life Recovery Matrix and List of Recycling Facilities, which is available at [www.allseating.com](http://www.allseating.com).**

Tools: #1 and #3 Phillips head screwdriver, Rubber mallet or hammer, flathead screwdriver, Allen key, Power Hand Tool (optional), Box cutter.

Skill Set: Good manual dexterity

Estimated Time: \_12\_ min. per chair.

Steps:

1. Book Basket – 1 min.

Unhook the book basket to separate it off the frame.

2. Armrest – 2 min. per arm

Remove the side screw by using an allen key or a power hand tool. Firmly grasp the armrest while hitting the sitting side of the arm with a rubber mallet to separate the arm off the frame.

3. Shell – 4 min.

Flip the chair upside-down. Remove the 4 screws that attaches the frame on to the shell and pull the frame up to separate from the plastic shell. A rubber mallet can be used to tap the shell down out of the frame. Separate the underseat rod off the shell.

4. Upholstered Seat Pad – 1 min.

Flip the shell upside-down and remove the 8 screws to separate the upholstered seat pad off the shell.

5. Glides – 2 min.

Firmly grasp the frames and hit the protruding side of the glides with a hammer or a rubber mallet to separate the glides off the frame.

***For further dismantling, the upholstery and foam could be removed from the seat pad. The plastic seat pad would be left.***